

CORROSION PREVENTIVE COMPOUND

C-614 – PX-1 – DEF STAN 80-217 – (ex-DEF 2331)

Description


Nycoprotec 17 is a mixture of lanolin and white spirit with a solid content of 30%_m.

Application

Nycoprotec 17 is used as a medium-term storage compound for various parts made of ferrous or light metal alloys. It leaves a soft protective film after evaporation of the solvent.

It is applied by brushing, dipping or spraying the compound onto the parts to protect as ambient temperature.

It is recommended to wrap the protected part into a grease-resistant paper after the solvent has evaporated.

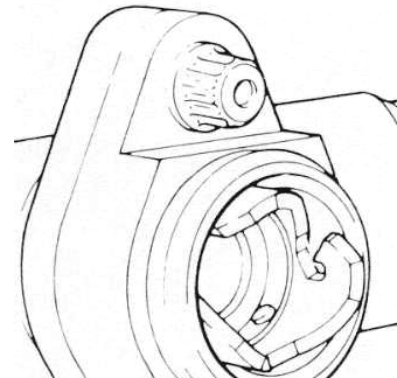

Characteristic	Unit	Result	Limit*	Test method
- Appearance	-	light brown oil	-	visual examination
- Specific gravity at 15°C	kg/m ³	819	-	ASTM D 4052
- Total solid content	% _m	30.0	28 –32	DEF STAN 05-50 Part 23 Annex M
- Water content	mg/kg	120	max. 1000	IP 74
- Film forming properties	-	conform	smooth, continuous, free from bittiness	DEF STAN 80-217 Annex A

* Specification DEF STAN 80-217 Issue 1.

The values above are typical values. They do not constitute any contractual commitment.
Sales specifications are available on request. The present technical data sheet replaces all the previous editions.